




1014PSE / 1016PSE

Stainless Steel 304/316, explosion proof Thermocouple head provided with FM/CSA certification NEMA 4X and IP68 Rating. The connection head accommodates a terminal block or transmitter 2" (50mm) in diameter.

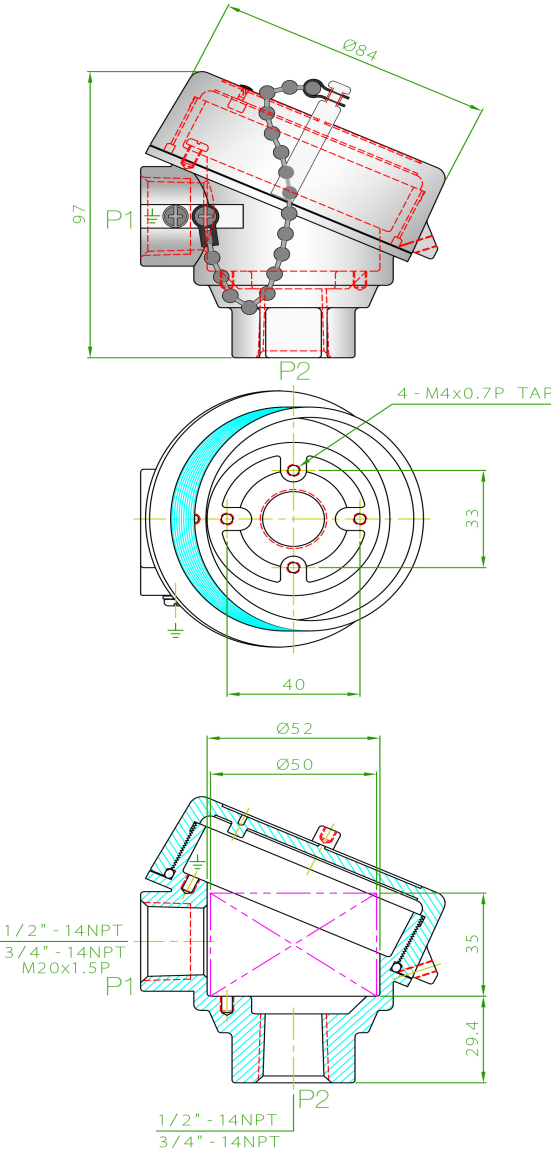

Class I Div I Groups B,C,D Class II Div I F&G Class III Type 4X IP68



Class I Div I Groups B,C,D Class II Div I Groups E,F,G Type 4X IP68

MODEL	SIZE(P1-P2)	DESCRIPTION
1014PSE-01	3/4" x 1/2" NPT	304 S.S Explosion Proof Thermocouple head FM/CSA cert. IP68
1014PSE-02	1/2" x 1/2" NPT	304 S.S Explosion Proof Thermocouple head FM/CSA cert. IP68
1014PSE-03	3/4" x 3/4" NPT	304 S.S Explosion Proof Thermocouple head FM/CSA cert. IP68
1014PSE-10*^	1/2" x 3/4" NPT	304 S.S Explosion Proof Thermocouple head FM/CSA cert. IP68
MODEL	SIZE(P1-P2)	DESCRIPTION
1016PSE-01	3/4" x 1/2" NPT	316 S.S Explosion Proof Thermocouple head FM/CSA cert. IP68
1016PSE-02	1/2" x 1/2" NPT	316 S.S Explosion Proof Thermocouple head FM/CSA cert. IP68
1016PSE-03	3/4" x 3/4" NPT	316 S.S Explosion Proof Thermocouple head FM/CSA cert. IP68
1016PSE-10*^	1/2" x 3/4" NPT	316 S.S Explosion Proof Thermocouple head FM/CSA cert. IP68

*P1:Conduit Size. *P2:Instrument Connection.

- [EXPLOSION-PROOF CERTIFIED](#)
- [NEMA 4X AND IP68 CERTIFIED](#)
- [SELECTION OF CONDUIT SIZES](#)
- [WIDE RANGE OF ACCESSORIES](#)

Material of construction : S.S. 304 or S.S 316

Certification : FM/CSA

Connections : ½"NPT,3/4"NPT AND M20X 1.5 P

Mounting Holes : See attached Drawing

Surface Finishing : S.S

"O" Ring : Buna "N"

Weight : 1.22 Kg (2.7 Lbs)

"Accessories" : Terminal Block(Ceramic or Bakelite)

*THESE PRODUCTS
UPON REQUEST WITH EXTRA LEAD TIME
1014PSE & 1016PSE 08 - 09 FM ONLY *^Require extra lead time