


# 1010PAET

Aluminum explosion proof Thermocouple head, provided with ATEX certification, IP68 rating.The connection head accommodates an elliptical block or transmitter 2" (50mm) in diameter.

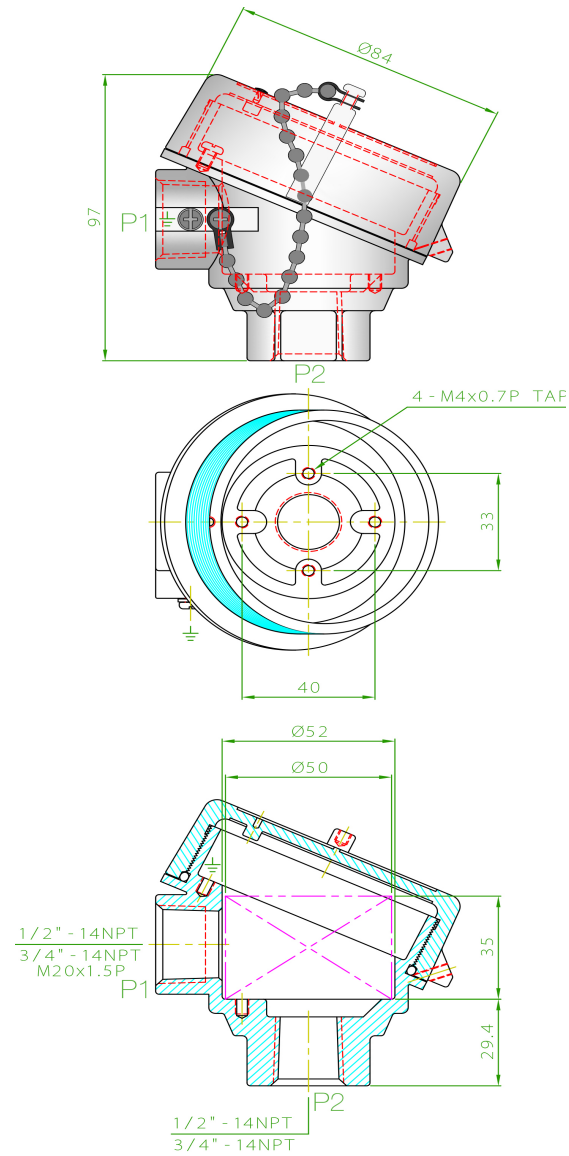

- [EXPLOSION-PROOF CERTIFIED](#)
- [IP68 CERTIFIED](#)
- [WIDE SELECTION OF CONDUIT SIZES](#)
- [OPTION FOR A CUSTOMIZED SS HALF MOON NAME PLATE](#)

Material of Construction : Die-Cast Aluminum or\* Copper free Aluminum

Certification : ATEX

Connections: : ½”NPT,3/4” NPT,M20 X 1.5P

Mounting Holes: : See attached Drawing

Surface Finishing: : painted Grey (CUSTOM COLOR)\*

"O" Ring: : Buna “N”

Weight: : 0.5 KG (1.1lbs)

Accessories: : Terminal Block(Ceramic or Bakelite)

II 2 G Exd II C Gb II2 D Ex tb III C Db IP68

MODEL	SIZE(P1-P2)	DESCRIPTION
1010PAET-01	3/4" x 1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX cert. IP68
1010PAET-02	1/2" x 1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX cert. IP68
1010PAET-03	3/4" x 3/4" NPT	Aluminum Explosion Proof Thermocouple head ATEX cert. IP68
1010PAET-08*	M20 x 1.5 x 1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX cert. IP68
1010PAET-09*	M20 x1.5 X 3/4" NPT	Aluminum Explosion Proof Thermocouple head ATEX cert. IP68
1010PAET-10*	1/2" x 3/4" NPT'	Aluminum Explosion Proof Thermocouple head ATEX cert. IP68

\*P1:Conduit Size. \*P2:Instrument Connection.

\*THESE PRODUCTS UPON REQUEST WITH EXTRA LEAD TIME  
\* THESE PRODUCTS UPON REQUEST UPON REQUEST WITH EXTRA LEAD TIME