


1110PWET



Aluminum explosion proof Thermocouple head, Epoxy coated blue provided with ATEX certification, IP66 rating. The connection head accommodates an elliptical block or transmitter 2" (50mm) in diameter.

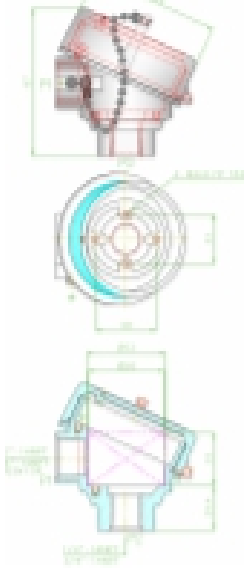

- EXPLOSION-PROOF CERTIFIED
- IP66 CERTIFIED
- WIDE SELECTION OF CONDUIT SIZES
- OPTION FOR A CUSTOMIZED SS HALF MOON *NAME PLATE for 1010PWET

Material of Construction : Die-Cast Aluminum or * Copper free Aluminum

Certification : ATEX

Connections: : 1/2" NPT, 3/4" NPT, 1/2", M20x1.5P, M24 x 1.5

Surface Finishing: : Epoxy Blue (custom color*)

"O" Ring : VITON

Weight: : 0.5 KG (1.1lbs)

Accessories: : Terminal Block (Ceramic or Bakelite)



II 2G Ex db IIC Gb Ta =16 °C to 80°C IP66

II2D Ex tb IIIC Db Ta=-16°C to 80°C IP66

Model	T1 Tread	T2 Tread	Description
1110PWET-01*	3/4"NPT X	1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-02*	1/2" NPT X	1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-03	3/4"NPT X	3/4" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-04*	1/2" NPT X	3/4" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-05*	3/4"NPT X	M20 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-06*	1/2" NPT X	M20 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-07	3/4"NPT X	M24 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-08	1/2" NPT X	M24 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-11	M20 X1.5 X	1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-12*	M20 X1.5 X	1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-13*	M20 X1.5 X	M20 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-14*	M20 X1.5 X	M24 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-15*	M24 X1.5 X	3/4" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-16*	M24 X1.5 X	1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-17*	M24 X1.5 X	M20 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWET-18*	M24 X1.5 X	M24 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66

Model	T1 Tread	T2 Tread	Description
1110PWT-01*	3/4"NPT X	1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-02*	1/2" NPT X	1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-03*	3/4"NPT X	3/4" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-04*	1/2" NPT X	1/4" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-05*	3/4"NPT X	M20 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-06*	1/2" NPT X	M20 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-07*	3/4"NPT X	M24 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-08*	1/2" NPT X	M24 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-11	M20 X1.5 X	1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-12*	M20 X1.5 X	1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-13*	M20 X1.5 X	M20 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-14*	M20 X1.5 X	M24 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-15*	M24 X1.5 X	3/4" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-16*	M24 X1.5 X	1/2" NPT	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-17*	M24 X1.5 X	M20 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66
1110PWT-18*	M24 X1.5 X	M24 X1.5	Aluminum Explosion Proof Thermocouple head ATEX IP66

* THESE PRODUCTS

UPON REQUEST WITH EXTRA LEAD TIME

(no gaps between the numbers)